

A				B			
PIN	A	B	C	PIN	A	B	C
4	6.20	1.50	2.60	37	22.70	18.00	19.10
5	6.70	2.00	3.10	38	23.20	18.50	19.60
6	7.20	2.50	3.60	39	23.70	19.00	20.10
7	7.70	3.00	4.10	40	24.20	19.50	20.60
8	8.20	3.50	4.60	41	24.70	20.00	21.10
9	8.70	4.00	5.10	42	25.20	20.50	21.60
10	9.20	4.50	5.60	43	25.70	21.00	22.10
11	9.70	5.00	6.10	44	26.20	21.50	22.60
12	10.20	5.50	6.60	45	26.70	22.00	23.10
13	10.70	6.00	7.10	46	27.20	22.50	23.60
14	11.20	6.50	7.60	47	27.70	23.00	24.10
15	11.70	7.00	8.10	48	28.20	23.50	24.60
16	12.20	7.50	8.60	49	28.70	24.00	25.10
17	12.70	8.00	9.10	50	29.20	24.50	25.60
18	13.20	8.50	9.60	51	29.70	25.00	26.10
19	13.70	9.00	10.10	52	30.20	25.50	26.60
20	14.20	9.50	10.60	53	30.70	26.00	27.10
21	14.70	10.00	11.10	54	31.20	26.50	27.60
22	15.20	10.50	11.60	55	31.70	27.00	28.10
23	15.70	11.00	12.10	56	32.20	27.50	28.60
24	16.20	11.50	12.60	57	32.70	28.00	29.10
25	16.70	12.00	13.10	58	33.20	28.50	29.60
26	17.20	12.50	13.60	59	33.70	29.00	30.10
27	17.70	13.00	14.10	60	34.20	29.50	30.60
28	18.20	13.50	14.60	61	34.70	30.00	31.10
29	18.70	14.00	15.10	62	35.20	30.50	31.60
30	19.20	14.50	15.60	63	35.70	31.00	32.10
31	19.70	15.00	16.10	64	36.20	31.50	32.60
32	20.20	15.50	16.60	65	36.70	32.00	33.10
33	20.70	16.00	17.10	66	37.20	32.50	33.60
34	21.20	16.50	17.60	67	37.70	33.00	34.10
35	21.70	17.00	18.10	68	38.20	33.50	34.60
36	22.20	17.50	18.60				




NOTES:
1.PLASTIC BURRS 0.1mm MAX
2.PART NO. SPECIFICATION: 11-50-XX01-XX

50:BOTTOM CONTACT
NO. OF CONTACT CODE


PACK:
1:Tape
2:Reel

Plating code:
1: Tin-Leadplated
2: Gold flash
3: Gold 3μ"
4: Gold 5μ"
5: Gold-flash on contact area

CUSTOMER DRAWING

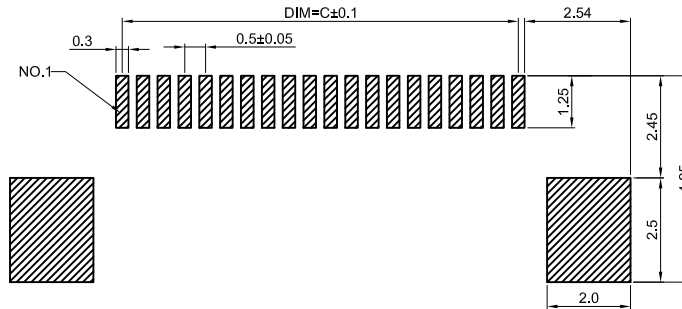


RECOMMENDED PCB LAYOUT

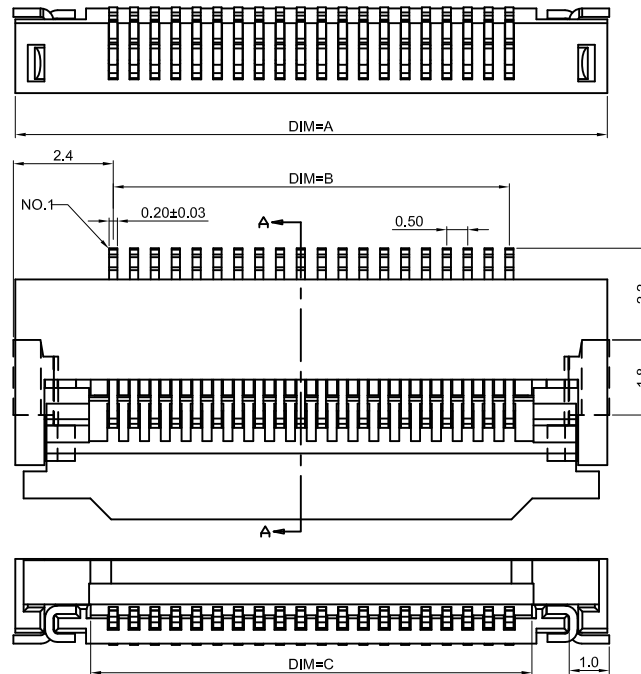



REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		MASS-PRODUCTION	04/20/2017	James

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 200V AC/Minute
Contact Resistance: ≤ 20mΩ
Insulation resistance: ≥ 500mΩ
Relative Humidity: 93%+40°C

Material Description:
Terminal: Phosphor Bronze Tin-Leadplated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

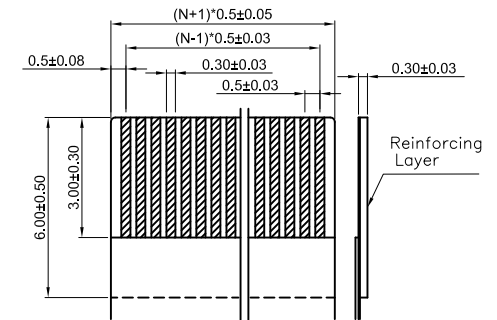

RECOMMENDED FFC/FPC DIM.

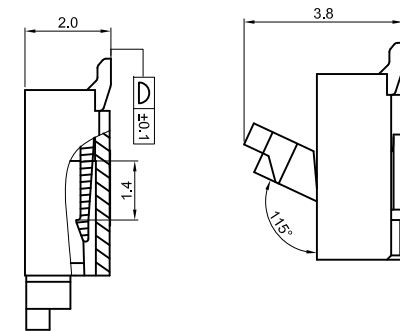

SECTION A-A

TOLERANCE UNIT(mm)		APPROVALS		DATE		CSG Industrial Co.,Ltd http://www.csg-china.com			
X. ±0.40		DRAWN				TITLE			
X.X ±0.30		CHECKED				0.50mm Pitch FPC(H 2.00)			
X.XX ±0.20		APPROVED				SCALE N.A.	PART NO.	DRAWING NO.	REV.
X.XXX ±0.10						SHEET 1 OF 1	11-50-XX01-XX	11-50-XX01-XX A	A
ANGULAR ±2°						CUSTOMER CODE	CUSTOMER PART NO.		
UNLESS OTHERWISE SPECIFIED									